

18NM65Z-U3

Power MOSFET

18A, 650V N-CHANNEL SUPER-JUNCTION MOSFET



DESCRIPTION

The UTC 18NM65Z-U3 is a Super Junction MOSFET Structure and is designed to have better characteristics, such as fast switching time, low gate charge, low on-state resistance and a high rugged avalanche characteristics. This power MOSFET is usually used at AC-DC converters for power applications.


FEATURES

- * $R_{DS(ON)} \leq 0.35 \Omega$ @ $V_{GS}=10V$, $I_D=6.5A$
- * Fast switching capability
- * Avalanche energy tested
- * Improved dv/dt capability, high ruggedness
- * With ESD Protected


SYMBOL

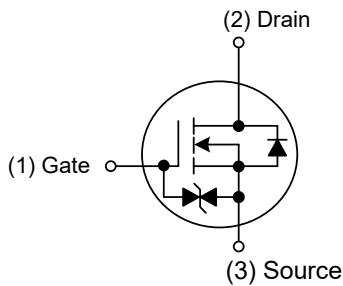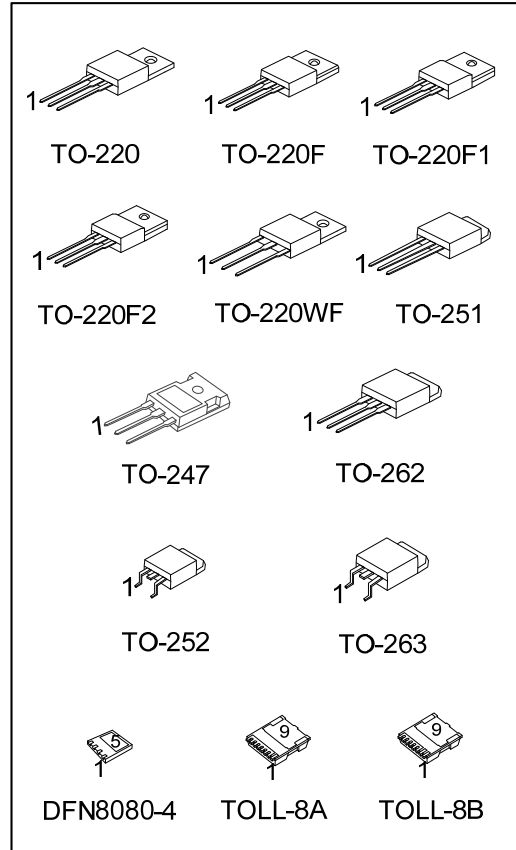


TO-220 / TO-220F / TO-220F1
TO-220F2 / TO-220WF / TO-251
TO-247 / TO-252 / TO-262 / TO-263

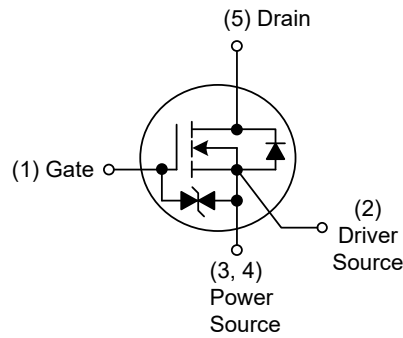

DFN8080-4



TOLL-8A

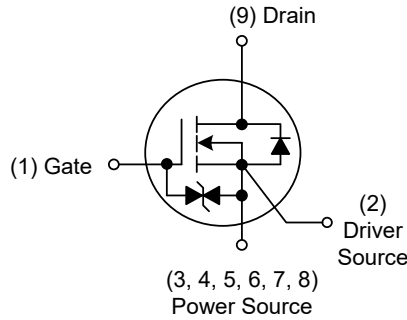

TOLL-8B

ORDERING INFORMATION

Ordering Number		Package	Pin Assignment									Packing
Lead Free	Halogen Free		1	2	3	4	5	6	7	8	9	
18NM65ZL-U3-TA3-T	18NM65ZG-U3-TA3-T	TO-220	G	D	S	-	-	-	-	-	-	Tube
18NM65ZL-U3-TF1-T	18NM65ZG-U3-TF1-T	TO-220F1	G	D	S	-	-	-	-	-	-	Tube
18NM65ZL-U3-TF2-T	18NM65ZG-U3-TF2-T	TO-220F2	G	D	S	-	-	-	-	-	-	Tube
18NM65ZL-U3-TF3-T	18NM65ZG-U3-TF3-T	TO-220F	G	D	S	-	-	-	-	-	-	Tube
18NM65ZL-U3-TW1-T	18NM65ZG-U3-TW1-T	TO-220WF	G	D	S	-	-	-	-	-	-	Tube
18NM65ZL-U3-TM3-T	18NM65ZG-U3-TM3-T	TO-251	G	D	S	-	-	-	-	-	-	Tube
18NM65ZL-U3-TN3-R	18NM65ZG-U3-TN3-R	TO-252	G	D	S	-	-	-	-	-	-	Tape Reel
18NM65ZL-U3-T2Q-T	18NM65ZG-U3-T2Q-T	TO-262	G	D	S	-	-	-	-	-	-	Tube
18NM65ZL-U3-TQ2-T	18NM65ZG-U3-TQ2-T	TO-263	G	D	S	-	-	-	-	-	-	Tube
18NM65ZL-U3-TQ2-R	18NM65ZG-U3-TQ2-R	TO-263	G	D	S	-	-	-	-	-	-	Tape Reel
18NM65ZL-U3-T47-T	18NM65ZG-U3-T47-T	TO-247	G	D	S	-	-	-	-	-	-	Tube
18NM65ZL-U3-K04-8080-R	18NM65ZG-U3-K04-8080-R	DFN8080-4	G	S	S	S	D	-	-	-	-	Tape Reel
18NM65ZL-U3-T8A-R	18NM65ZG-U3-T8A-R	TOLL-8A	G	S	S	S	S	S	S	S	D	Tape Reel
18NM65ZL-U3-T8B-R	18NM65ZG-U3-T8B-R	TOLL-8B	G	S	S	S	S	S	S	S	D	Tape Reel

Note: Pin Assignment: G: Gate D: Drain S: Source

18NM65ZG-U3-TA3-T (1) Packing Type (2) Package Type (3) Version Code (4) Green Package	(1) T: Tube, R: Tape Reel (2) TA3: TO-220, TF1: TO-220F1, TF2: TO-220F2, TF3: TO-220F, TW1: TO-220WF, TM3: TO-251, TN3: TO-252, T2Q: TO-262, TQ2: TO-263, T47: TO-247, K04-8080: DFN8080-4, T8A: TOLL-8A, T8B: TOLL-8B (3) Version U3 (4) G: Halogen Free and Lead Free L: Lead Free
---	--

MARKING

TO-220 / TO-220F / TO-220F1 TO-220F2 / TO-220WF / TO-251 TO-247 / TO-252 / TO-262 / TO-263	DFN8080-4
UTC 18NM65Z Version Code ← U3 Lot Code ← Date Code → L: Lead Free G: Halogen Free 1	UTC 18NM65Z Version Code ← U3 Lot Code ← Date Code →
TOLL-8A / TOLL-8B	-
UTC 18NM65Z Version Code ← U3 Lot Code ← Date Code → L: Lead Free G: Halogen Free 1	-

■ **ABSOLUTE MAXIMUM RATINGS** ($T_C=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER			SYMBOL	RATINGS	UNIT
Drain-Source Voltage			V _{DSS}	650	V
Gate-Source Voltage			V _{GSS}	±20	V
Drain Current	Continuous	T _C =25°C	I _D	18	A
		T _C =100°C		11.7	A
	Pulsed (Note 2)		I _{DM}	54	A
Avalanche Energy	Single Pulsed (Note 3)		E _{AS}	156	mJ
Peak Diode Recovery dv/dt (Note 4)			dv/dt	1.4	V/ns
Power Dissipation	TO-220/TO-262/TO-263		P _D	100	W
	TO-220F/TO-220F1			30	W
	TO-220F2/TO-220WF				
	TO-251/TO-252			60	W
	TO-247			115	W
	DFN8080-4			56	W
	TOLL-8A/TOLL-8B			181	W
Junction Temperature			T _J	+150	°C
Storage Temperature			T _{STG}	-55 ~ +150	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Repetitive Rating: Pulse width limited by maximum junction temperature.

3. $L = 10\text{mH}$, $I_{AS} = 1.8\text{A}$, $V_{DD} = 50\text{V}$, $R_G = 25\Omega$ Starting $T_J = 25^{\circ}\text{C}$

4. $I_{SD} \leq 18\text{A}$, $di/dt \leq 200\text{A}/\mu\text{s}$, $V_{DD} \leq BV_{DSS}$, Starting $T_J = 25^{\circ}\text{C}$

■ **THERMAL DATA**

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	TO-220/TO-220F TO-220F1/TO-220F2 TO-220WF/TO-262/TO-263	θ_{JA}	62.5	$^{\circ}\text{C}/\text{W}$
	TO-247		40	$^{\circ}\text{C}/\text{W}$
	TO-251/TO-252		110	$^{\circ}\text{C}/\text{W}$
	DFN8080-4		35	$^{\circ}\text{C}/\text{W}$
	TOLL-8A/TOLL-8B		35	$^{\circ}\text{C}/\text{W}$
Junction to Case	TO-220/TO-262/TO-263	θ_{JC}	1.25	$^{\circ}\text{C}/\text{W}$
	TO-220F/TO-220F1 TO-220F2/TO-220WF		4.16	$^{\circ}\text{C}/\text{W}$
	TO-251/TO-252		2.08 (Note)	$^{\circ}\text{C}/\text{W}$
	TO-247		1.08	$^{\circ}\text{C}/\text{W}$
	DFN8080-4		2.23 (Note)	$^{\circ}\text{C}/\text{W}$
	TOLL-8A/TOLL-8B		0.69 (Note)	$^{\circ}\text{C}/\text{W}$

Note: Device mounted on FR-4 substrate PC board, 2oz copper, with 1inch square copper plate.


■ **ELECTRICAL CHARACTERISTICS** ($T_J=25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V, I _D =250μA	650			V
Drain-Source Leakage Current	I _{DSS}	V _{DS} =650V, V _{GS} =0V			10	μA
Gate-Source Leakage Current	I _{GSS}	V _{GS} =±20V, V _{DS} =0V			±10	μA
ON CHARACTERISTICS						
Gate Threshold Voltage	V _{GS(TH)}	V _{DS} =V _{GS} , I _D =250μA	2.5		4.5	V
Static Drain-Source On-State Resistance	R _{DS(ON)}	V _{GS} =10V, I _D =6.5A			0.35	Ω
DYNAMIC CHARACTERISTICS						
Input Capacitance	C _{ISS}	V _{GS} =0V, V _{DS} =50V, f=1MHz		1055		pF
Output Capacitance	C _{OSS}			157		pF
Reverse Transfer Capacitance	C _{RSS}			4		pF
SWITCHING CHARACTERISTICS						
Total Gate Charge (Note 1)	Q _G	V _{DS} =520V, V _{GS} =10V, I _D =1.0A (Note 1, 2)		36		nC
Gate-Source Charge	Q _{GS}			7		nC
Gate-Drain Charge	Q _{GD}			10		nC
Turn-On Delay Time (Note 1)	t _{D(ON)}	V _{DD} =100V, V _{GS} =10V, I _D =9.0A, R _G =25Ω (Note 1, 2)		13		ns
Turn-On Rise Time	t _{tr}			23		ns
Turn-Off Delay Time	t _{D(OFF)}			96		ns
Turn-Off Fall Time	t _f			54		ns
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS						
Maximum Continuous Drain-Source Diode Forward Current	I _S				18	A
Maximum Pulsed Drain-Source Diode Forward Current	I _{SM}				36	A
Drain-Source Diode Forward Voltage (Note 1)	V _{SD}	I _S =18A, V _{GS} =0V			1.4	V
Body Diode Reverse Recovery Time (Note 1)	t _{rr}	I _S =18A, V _{GS} =0V, I _F /dt=100A/μs		316		nS
Body Diode Reverse Recovery Charge	Q _{rr}			3572		nC


Notes: 1. Pulse Test: Pulse width $\leq 300\mu s$, Duty cycle $\leq 2\%$.

2. Essentially independent of operating temperature.

■ TEST CIRCUITS AND WAVEFORMS

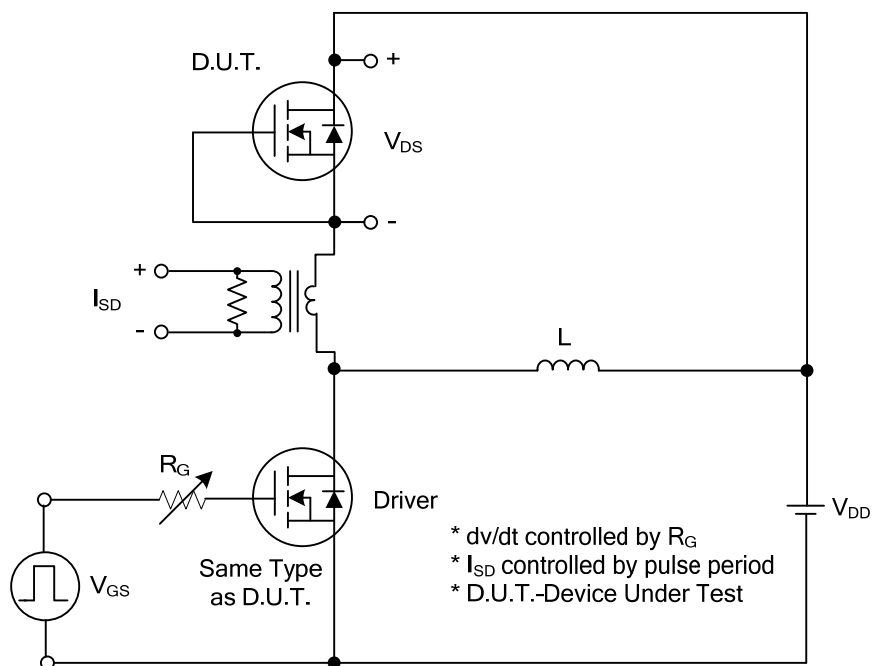


Peak Diode Recovery dv/dt Test Circuit

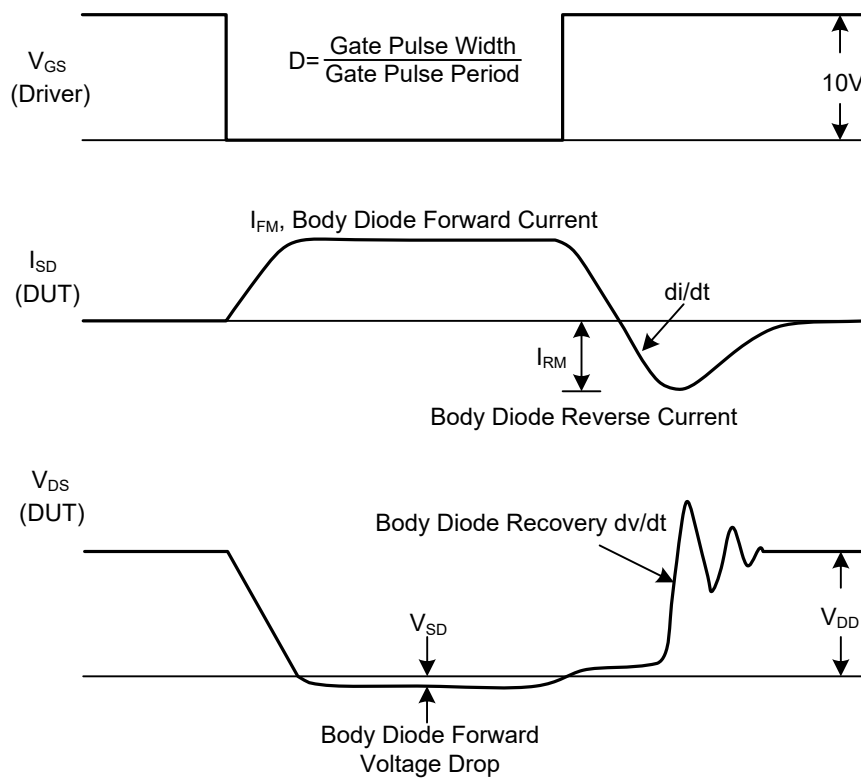


Peak Diode Recovery dv/dt Waveforms


■ TEST CIRCUITS AND WAVEFORMS

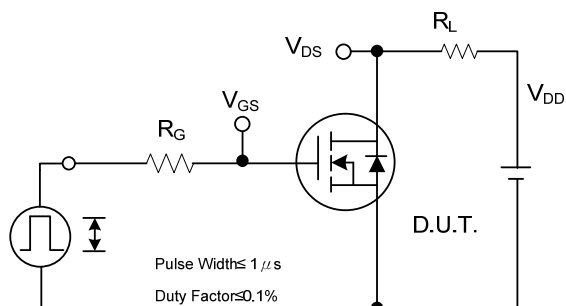


Switching Test Circuit

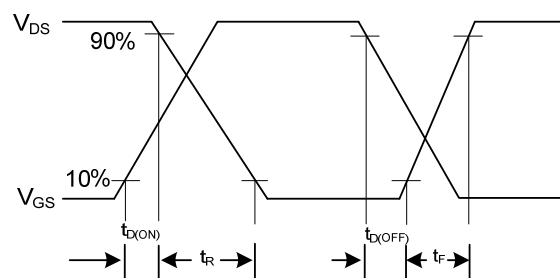


Switching Waveforms

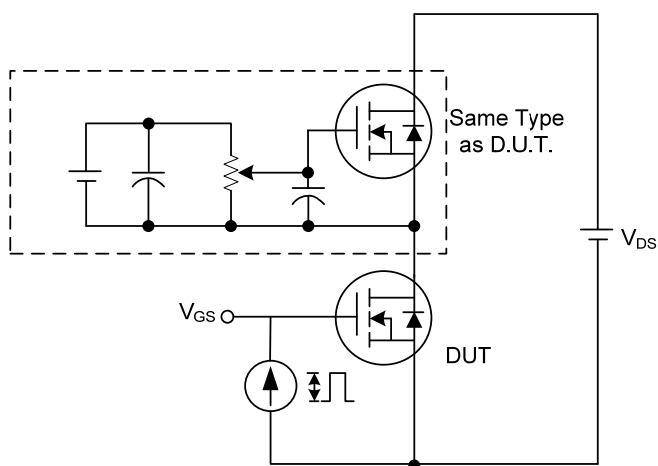


Gate Charge Test Circuit

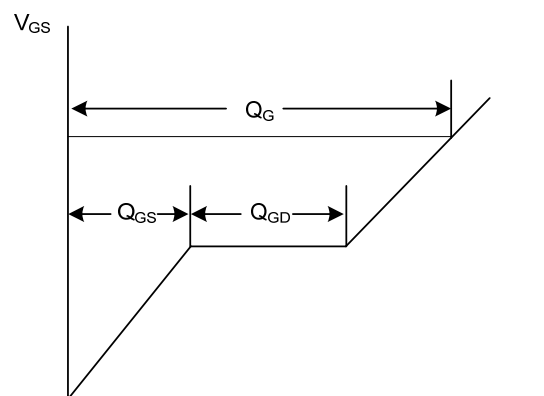

Charge
Gate Charge Waveform






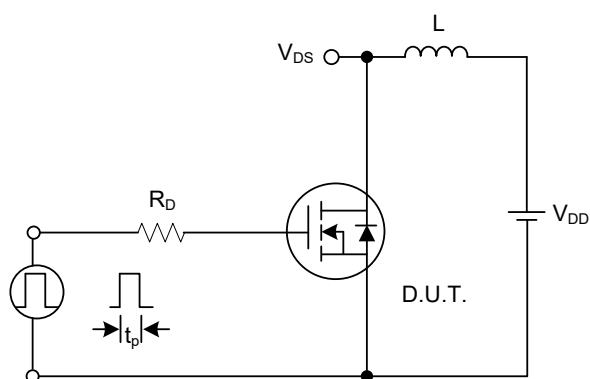


Unclamped Inductive Switching Test Circuit






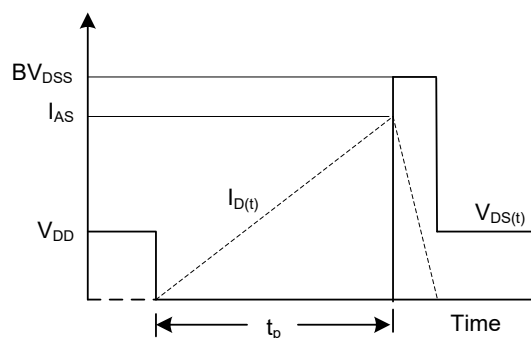


Unclamped Inductive Switching Waveforms


TYPICAL CHARACTERISTICS

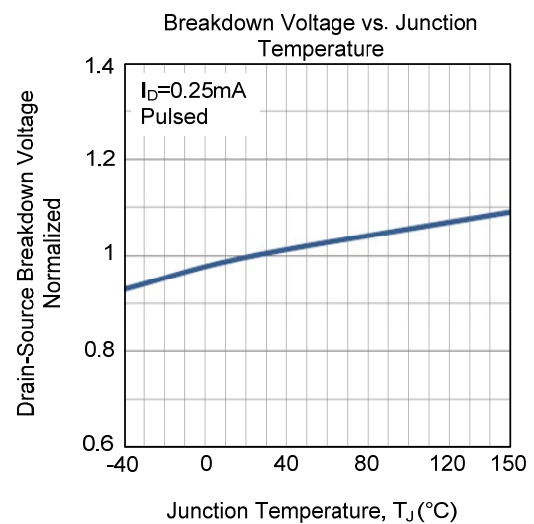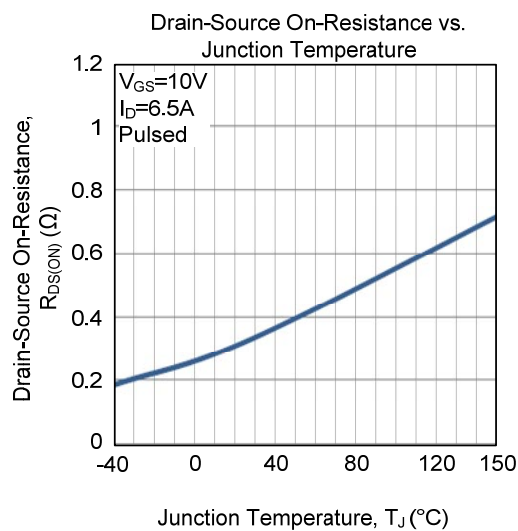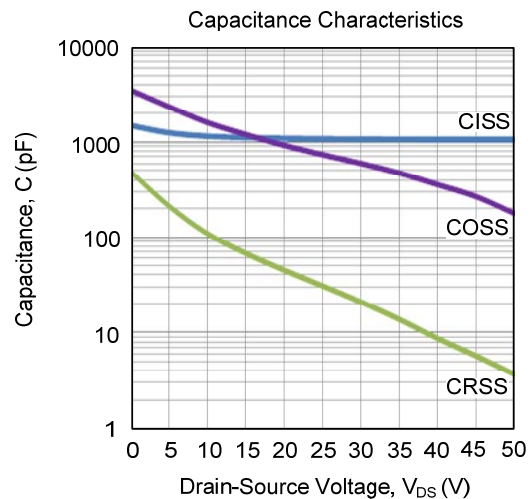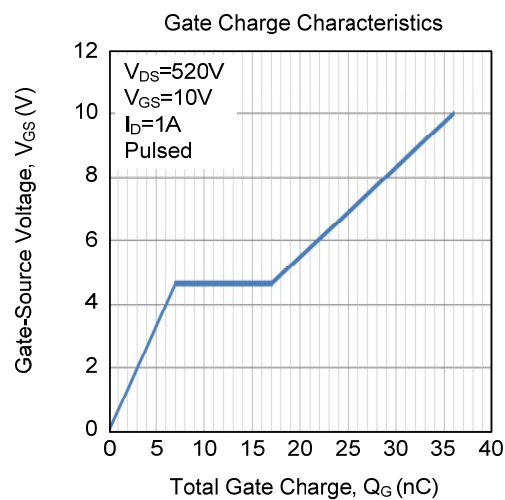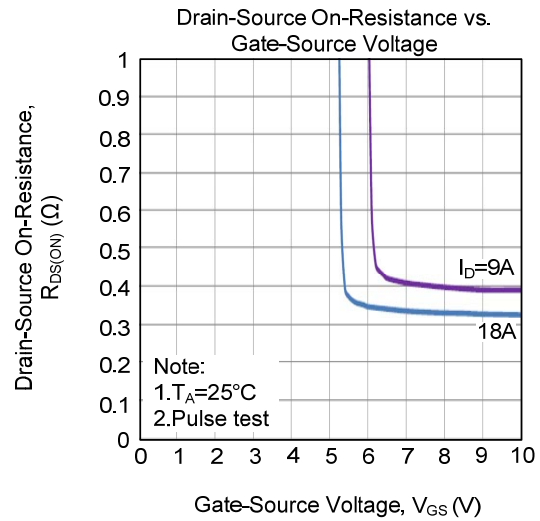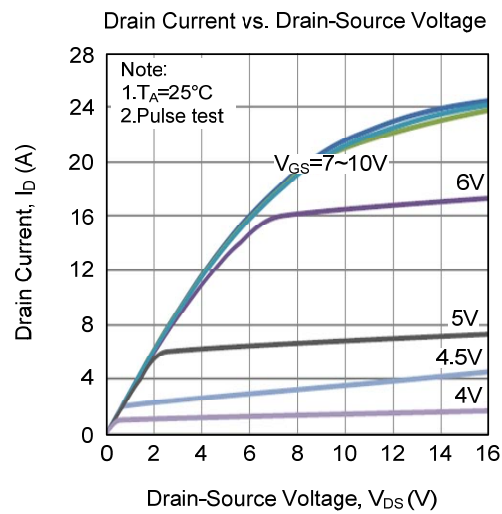

TYPICAL CHARACTERISTICS (Cont.)

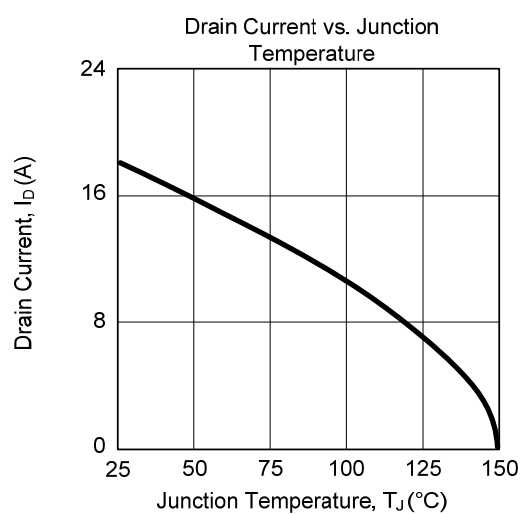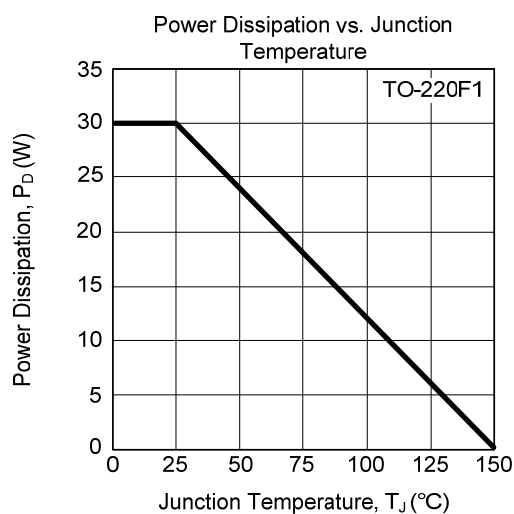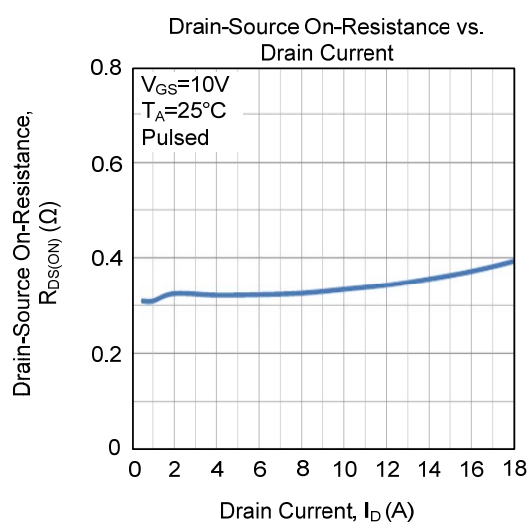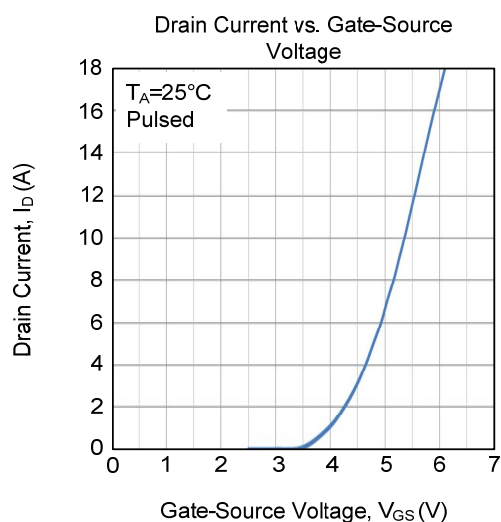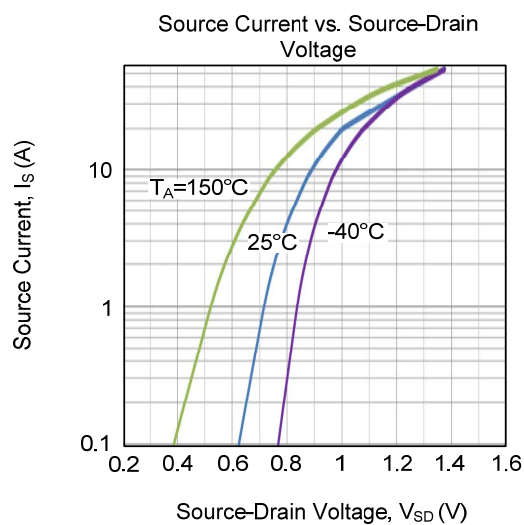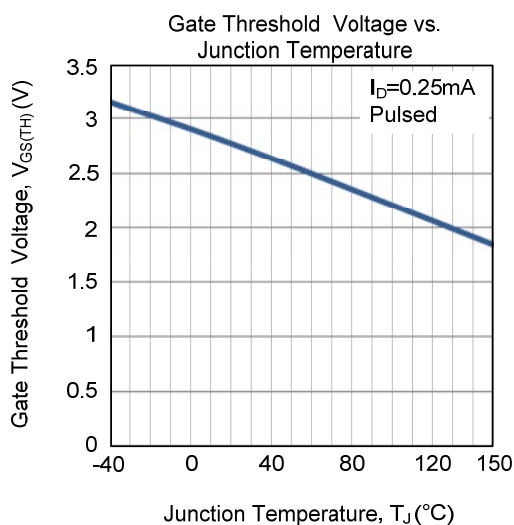

■ TYPICAL CHARACTERISTICS (Cont.)

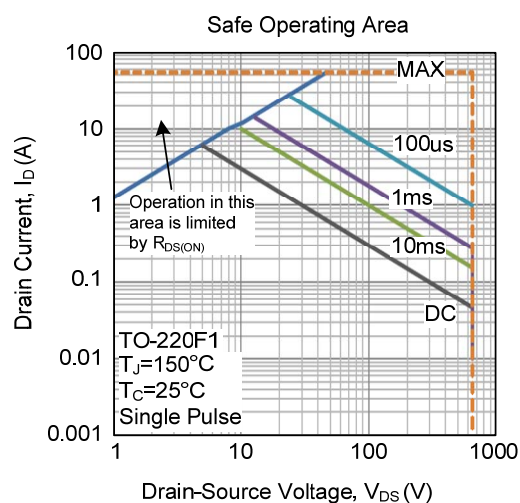

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.