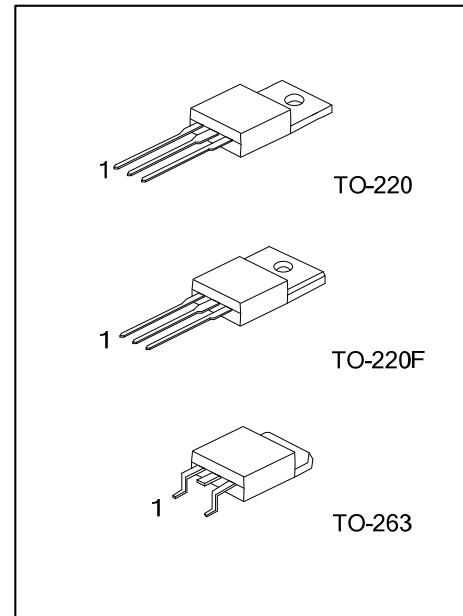


**2SC5027****NPN SILICON TRANSISTOR****HIGH VOLTAGE AND HIGH RELIABILITY****■ FEATURES**


- * High Voltage ($V_{CEO} = 750V$)
- * High Speed Switching
- * Wide SOA

**■ ORDERING INFORMATION**

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
2SC5027L-x-TA3-T	2SC5027G-x-TA3-T	TO-220	B	C	E	Tube
2SC5027L-x-TF3-T	2SC5027G-x-TF3-T	TO-220F	B	C	E	Tube
2SC5027L-x-TQ2-T	2SC5027G-x-TQ2-T	TO-263	B	C	E	Tube
2SC5027L-x-TQ2-T	2SC5027G-x-TQ2-T	TO-263	B	C	E	Tape Reel

Note: Pin Assignment: B: Base C: Collector E: Emitter

2SC5027G-x-TA3-T (1) Packing Type (2) Package Type (3) Rank (4) Green Package	(1) T: Tube, R: Tape Reel (2) TA3: TO-220, TF3: TO-220F, TQ2: TO-263 (3) x: refer to Classification of h_{FE1} (4) G: Halogen Free and Lead Free, L: Lead Free
---	--

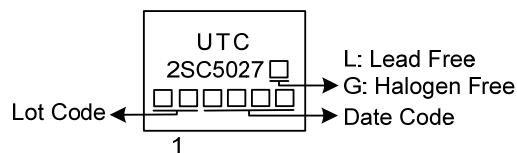■ MARKING

■ **ABSOLUTE MAXIMUM RATINGS** ($T_C = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Collector-Base Voltage		V_{CB0}	850	V
Collector-Emitter Voltage		V_{CEO}	750	V
Collector-Emitter Voltage		V_{EBO}	7	V
Peak Collector Current		I_C	3	A
Collector Current (Pulse)		I_{CP}	10	A
Base Current		I_B	1.5	A
Power Dissipation	TO-220	P_C	50	W
	TO-263			
	TO-220F		40	W
Junction Temperature		T_J	+150	$^\circ\text{C}$
Storage Temperature		T_{STG}	-55 ~ +150	$^\circ\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.







■ **ELECTRICAL CHARACTERISTICS** ($T_C = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector-Base Breakdown Voltage	BV_{CB0}	$I_C=1\text{mA}$, $I_E=0$	850			V
Collector-Emitter Breakdown Voltage	BV_{CEO}	$I_C=5\text{mA}$, $I_B=0$	750			V
Emitter-Base Breakdown Voltage	BV_{EBO}	$I_E=1\text{mA}$, $I_C=0$	7			V
Collector Cut-off Current	I_{CBO}	$V_{CB}=800\text{V}$, $I_E=0$			10	μA
Emitter Cut-off Current	I_{EBO}	$V_{EB}=5\text{V}$, $I_C=0$			10	μA
DC Current Gain	h_{FE1}	$V_{CE}=5\text{V}$, $I_C=0.2\text{A}$	10		40	
	h_{FE2}	$V_{CE}=5\text{V}$, $I_C=1\text{A}$	8			
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C=1.5\text{A}$, $I_B=0.3\text{A}$			2	V
Base-Emitter Saturation Voltage	$V_{BE(SAT)}$	$I_C=1.5\text{A}$, $I_B=0.3\text{A}$			1.5	V
Output Capacitance	C_{ob}	$V_{CB}=10\text{V}$, $f=1\text{MHz}$, $I_E=0$		60		pF
Current Gain Bandwidth Product	f_T	$V_{CE}=10\text{V}$, $I_C=0.2\text{A}$		15		MHz
Turn ON Time	t_{ON}	$V_{CC}=400\text{V}$			0.5	μs
Storage Time	t_S	$I_C=5\text{I}_{B1}=-2.5\text{I}_{B2}=2.0\text{A}$			3	μs
Fall Time	t_F	$R_L=200\Omega$			0.3	μs



■ **CLASSIFICATION of h_{FE1}**

RANK	N	R	O
RANGE	10 ~ 20	15 ~ 30	20 ~ 40

TYPICAL CHARACTERISTICS

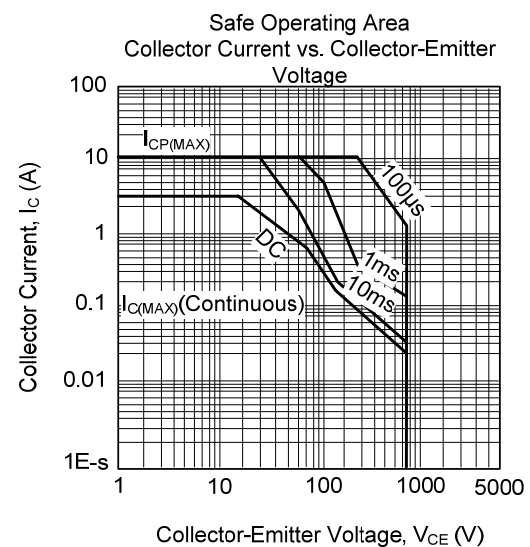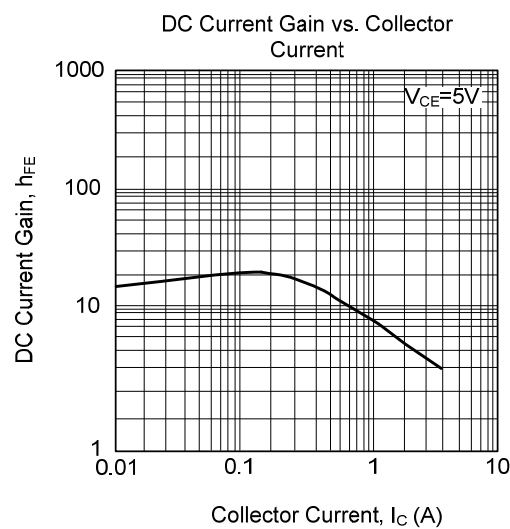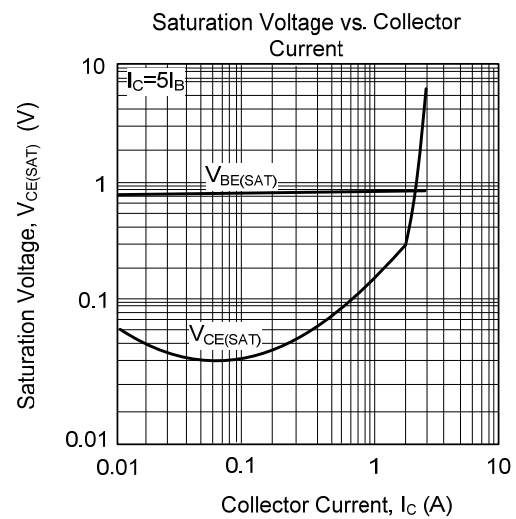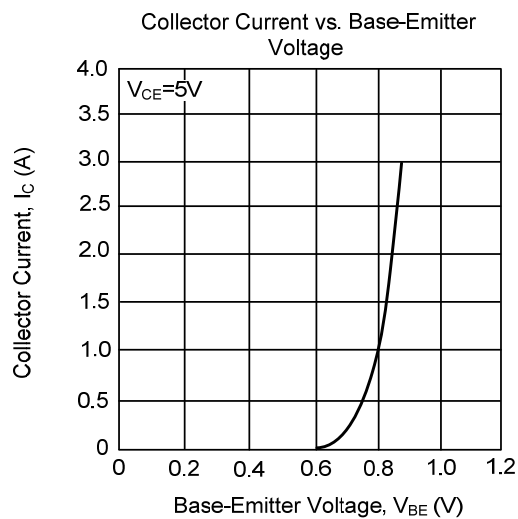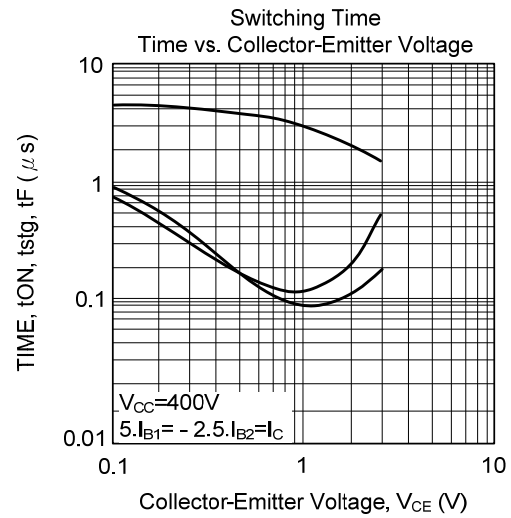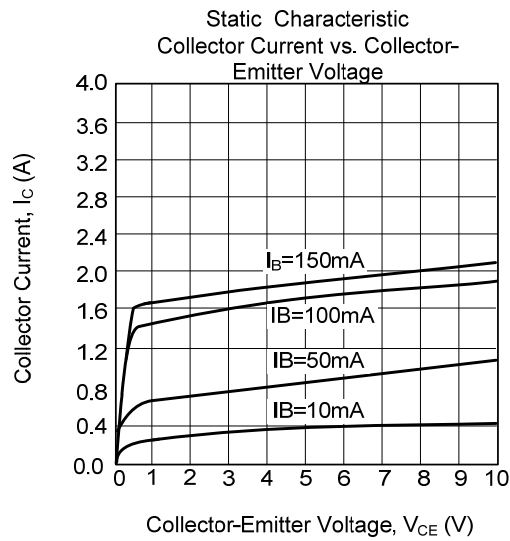

■ TYPICAL CHARACTERISTICS (Cont.)

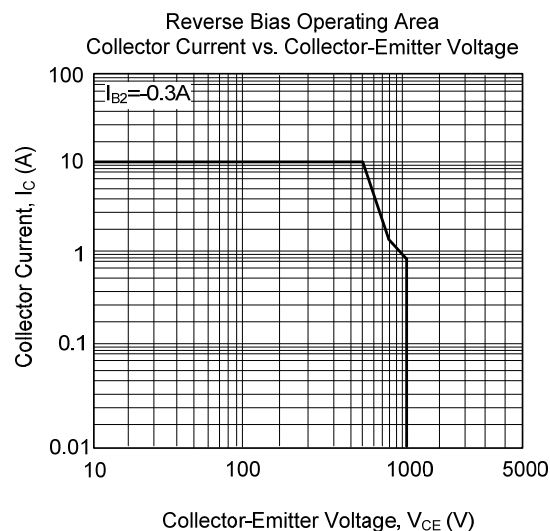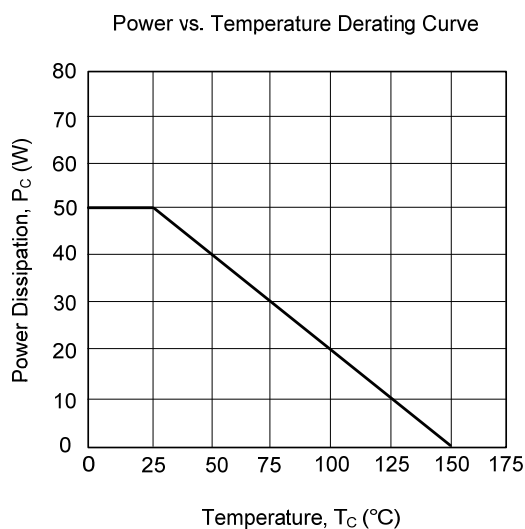

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.