



BTA312A

TRIAC



12A TRIACS

DESCRIPTION

The UTC **BTA312A** is a 12A triacs which can be operated in 3 quadrants only, it uses UTC's advanced technology to provide customers with high commutation performances, etc.

The UTC **BTA312A** is suitable for inductive load switching operations, also can be used in ON/OFF function applications such as induction motor starting circuits, heating regulation, static relays etc.

SYMBOL

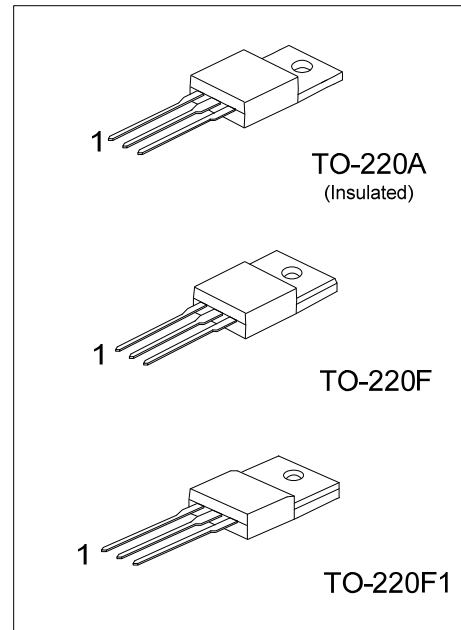

ORDERING INFORMATION

| Ordering Number | | Package | Pin Assignment | | | Packing |
|---------------------|---------------------|----------|----------------|-----|---|---------|
| Lead Free | Halogen Free | | 1 | 2 | 3 | |
| BTA312AL-x-xx-TA0-T | BTA312AG-x-xx-TA0-T | TO-220A | MT1 | MT2 | G | Tube |
| BTA312AL-x-xx-TF1-T | BTA312AG-x-xx-TF1-T | TO-220F1 | MT1 | MT2 | G | Tube |
| BTA312AL-x-xx-TF3-T | BTA312AG-x-xx-TF3-T | TO-220F | MT1 | MT2 | G | Tube |

Note: Pin Assignment: MT1: MT1 MT2: MT2 G: Gate


| | |
|---|---|
| <p>BTA312AG-x-xx-TA0-T</p> <p>(1)Packing Type (2)Package Type (3)Sensitivity and type (4)Voltage (5)Green Package</p> | <p>(1) T: Tube (2) TA0: TO-220A, TF1: TO-220F1, TF3: TO-220F (3) refer to SENSITIVITY AND TYPE (4) 6: 600V, 8: 800V (5) G: Halogen Free and Lead Free, L: Lead Free</p> |
|---|---|

SENSITIVITY AND TYPE

| PART NUMBER | VOLTAGE | | SENSITIVITY | TYPE |
|-------------|---------|------|-------------|-------------|
| | 600V | 800V | | |
| BW | ⊙ | ⊙ | 50mA | SNUBBERLESS |
| CW | ⊙ | ⊙ | 35mA | SNUBBERLESS |
| SW | ⊙ | ⊙ | 10mA | LOGIC LEVEL |
| TW | ⊙ | ⊙ | 5mA | LOGIC LEVEL |

⊙ : Available

MARKING

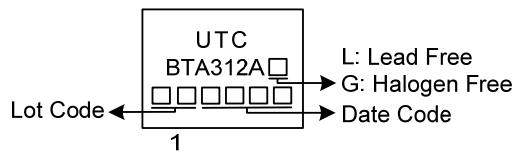

■ ABSOLUTE MAXIMUM RATINGS

| PARAMETER | | | SYMBOL | RATINGS | UNIT |
|---|-------------------------|-------------------------|-------------------|-----------------------|------------------------|
| RMS On-State Current (Full Sine Wave) | $T_C=90^\circ\text{C}$ | | $I_{T(RMS)}$ | 12 | A |
| Non Repetitive Surge Peak On-State Current (Full Cycle, T_J initial= 25°C) | F=50 Hz | t=20ms | I_{TSM} | 120 | A |
| | F=60 Hz | t=16.7ms | | 126 | A |
| I^2t Value for Fusing | $t_p=10\text{ms}$ | | I^2t | 78 | A^2s |
| Critical Rate of Rise of On-State Current $I_G=2xI_{GT}$, $t_r \leq 100\text{ns}$ | F=120 Hz | $T_J=125^\circ\text{C}$ | dI/dt | 50 | $\text{A}/\mu\text{s}$ |
| Non Repetitive Surge Peak Off-State Voltage | $t_p=10\text{ms}$ | $T_J=25^\circ\text{C}$ | V_{DSM}/V_{RSM} | $V_{DRM}/V_{RRM}+100$ | V |
| Peak Gate Current | $t_p=20\mu\text{s}$ | $T_J=125^\circ\text{C}$ | I_{GM} | 4 | A |
| Average Gate Power Dissipation | $T_J=125^\circ\text{C}$ | | $P_{G(AV)}$ | 1 | W |
| Operating Junction Temperature | | | T_J | -40 ~ +125 | $^\circ\text{C}$ |
| Storage Junction Temperature | | | T_{STG} | -40 ~ +150 | $^\circ\text{C}$ |

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

| PARAMETER | SYMBOL | RATINGS | UNIT |
|-----------------------|---------------|---------|---------------------------|
| Junction to Ambient | θ_{JA} | 60 | $^\circ\text{C}/\text{W}$ |
| Junction to Case (AC) | θ_{JC} | 2.3 | $^\circ\text{C}/\text{W}$ |

■ ELECTRICAL CHARACTERISTICS ($T_J=25^\circ\text{C}$ unless otherwise specified)

FOR SNUBBERLESS TYPE and LOGIC LEVEL TYPE (3 QUADRANTS)

| PARAMETER | SYMBOL | TEST CONDITIONS | TW | | | SW | | | CW | | | BW | | | UNIT |
|--|----------|---|----------|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|-----|------------------------|
| | | | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | |
| Gate Trigger Current (Note 1) | I_{GT} | $V_D=12\text{V}$, $R_L=30\Omega$ | I-II-III | | 5 | | | 10 | | | 35 | | | 50 | mA |
| Gate Trigger Voltage | V_{GT} | | I-II-III | | 1.3 | | | 1.3 | | | 1.3 | | | 1.3 | V |
| Gate Non-Trigger Voltage | V_{GD} | $V_D=V_{DRM}$, $R_L=3.3\text{k}\Omega$, $T_J=125^\circ\text{C}$ | I-II-III | 0.2 | | | 0.2 | | | 0.2 | | | 0.2 | | V |
| Holding Current (Note 2) | I_H | $I_T=100\text{mA}$ | | | 10 | | | 15 | | | 35 | | | 50 | mA |
| Latching Current | I_L | $I_G=1.2I_{GT}$ | I-III | | 10 | | | 25 | | | 50 | | | 70 | mA |
| | | | II | | 15 | | | 30 | | | 60 | | | 80 | mA |
| Critical Rate of Rise of Off-State Voltage (Note 2) | dV/dt | $V_D=67\%V_{DRM}$, Gate Open, $T_J=125^\circ\text{C}$ | | 20 | | | 40 | | | 500 | | | 1000 | | $\text{V}/\mu\text{s}$ |
| Critical Rate of Rise of Off-State Voltage at Commutation (Note 2) | (dI/dt)c | (dV/dt)c=0.1V/ μs , $T_J=125^\circ\text{C}$ | | 3.5 | | | 6.5 | | | | | | | | A/ms |
| | | (dV/dt)c=10V/ μs , $T_J=125^\circ\text{C}$ | | 1 | | | 2.9 | | | | | | | | |
| | | Without Snubber $T_J=125^\circ\text{C}$ | | | | | | | | 6.5 | | | 12 | | |

Note: 1. Minimum I_{GT} is guaranteed at 5% of I_{GT} max.
2. For both polarities of MT2 referenced to MT1.

■ STATIC CHARACTERISTICS







| PARAMETER | SYMBOL | TEST CONDITIONS | | MIN | TYP | MAX | UNIT |
|-----------------------------------|-----------|-------------------------------|-------------------|-----|-----|------|------------|
| Peak On-State Voltage (Note) | V_T | $I_{TM}=17A$, $t_p=380\mu s$ | $T_J=25^\circ C$ | | | 1.55 | V |
| Threshold Voltage (Note) | V_{TO} | | $T_J=125^\circ C$ | | | 0.85 | V |
| Dynamic Resistance (Note) | R_D | | $T_J=125^\circ C$ | | | 35 | m Ω |
| Repetitive Peak Off-State Current | I_{DRM} | $V_{DRM}=V_{RRM}$ | $T_J=25^\circ C$ | | | 5 | μA |
| | I_{RRM} | | $T_J=125^\circ C$ | | | 1 | mA |

Note: 1. Minimum I_{GT} is guaranteed at 5% of I_{GT} max.
 2. For both polarities of MT2 referenced to MT1.


■ ISOLATION CHARACTERISTICS

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-----------------------|-----------------|--|-----|-----|------|------|
| RMS isolation voltage | $V_{ISOL(RMS)}$ | from all terminals to external heatsink; sinusoidal waveform; clean and dust free; $50\text{ Hz} \leq f \leq 60\text{ Hz}$; $RH \leq 65\%$; $T_h = 25^\circ C$ | | | 2500 | V |

TYPICAL CHARACTERISTICS

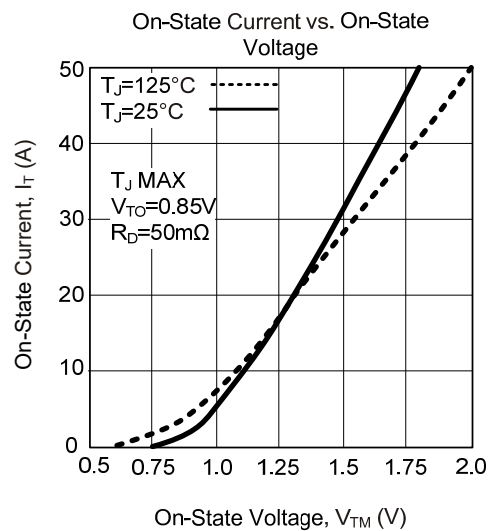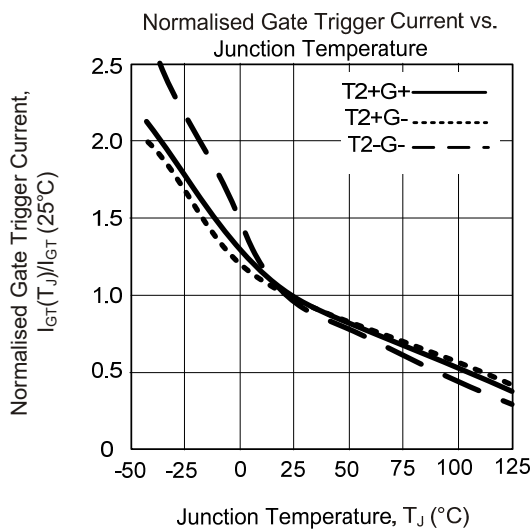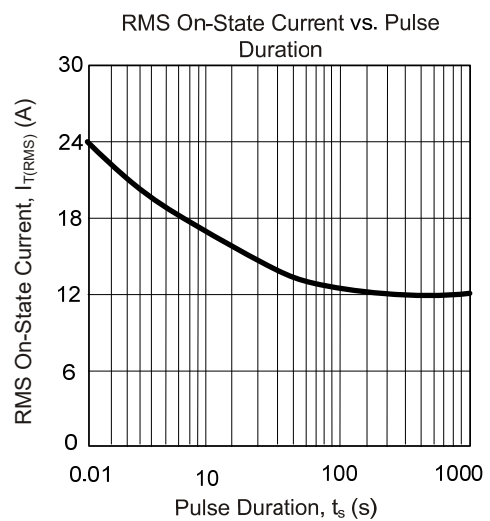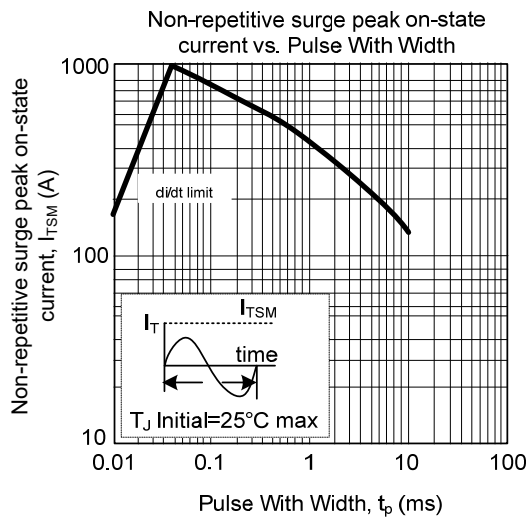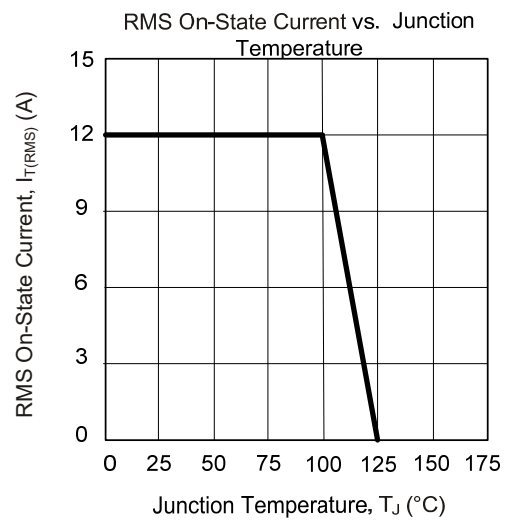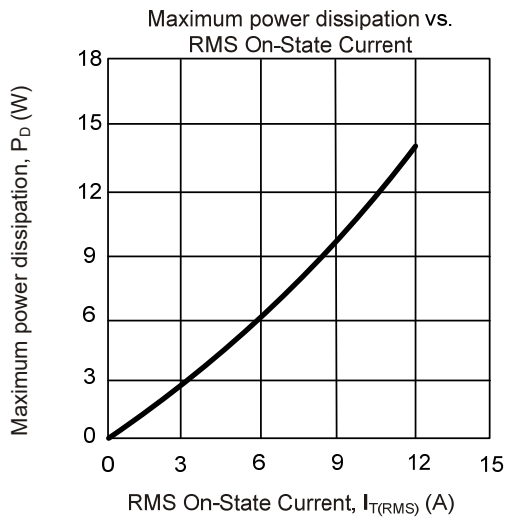

■ TYPICAL CHARACTERISTICS (Cont.)

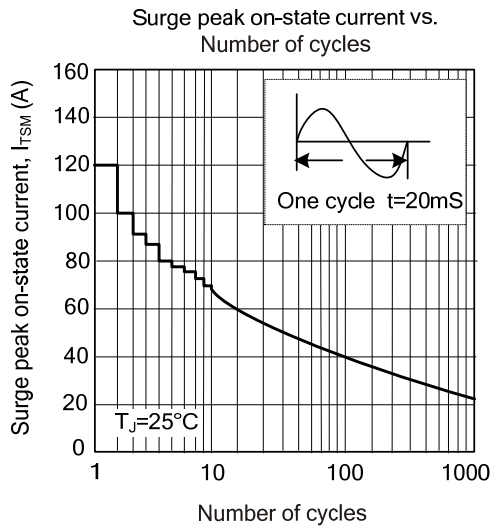

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.