



U74ACT00

CMOS IC


QUADRUPLE 2-INPUT POSITIVE-NAND GATES

DESCRIPTION


The UTC **U74ACT00** contains four independent 2-input positive-nand gates. Each Gate Performs the Boolean function $Y = \overline{A \bullet B}$ or $Y = \overline{A + B}$

FEATURES

- * Operation Voltage Range: 4.5~5.5V
- * Low Power Dissipation: $I_{cc}=2\mu A$ (Max.)
- * High Noise Immunity
- * Compatible With TTL Output



SOP-14U




TSSOP-14U

ORDERING INFORMATION

Ordering Number		Package	Packing
Lead Free	Halogen Free		
U74ACT00L-UEA-R	U74ACT00G-UEA-R	SOP-14U	Tape Reel
U74ACT00L-UEB-R	U74ACT00G-UEB-R	TSSOP-14U	Tape Reel

U74ACT00G-UEA-R

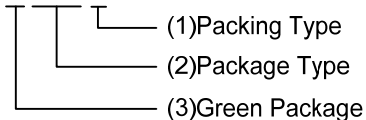


- (1) R: Tape Reel
- (2) UEA: SOP-14U, UEB: TSSOP-14U
- (3) G: Halogen Free and Lead Free, L: Lead Free

MARKING

SOP-14U	TSSOP-14U
14 13 12 11 10 9 8 UTC □□□□ → Date Code U74ACT00 □ → L: Lead Free □ → G: Halogen Free □□ → Lot Code 1 2 3 4 5 6 7	14 13 12 11 10 9 8 UTC □□□□ → Date Code U74ACT00 □ → L: Lead Free □ → G: Halogen Free □□ → Lot Code 1 2 3 4 5 6 7

■ PIN CONFIGURATION

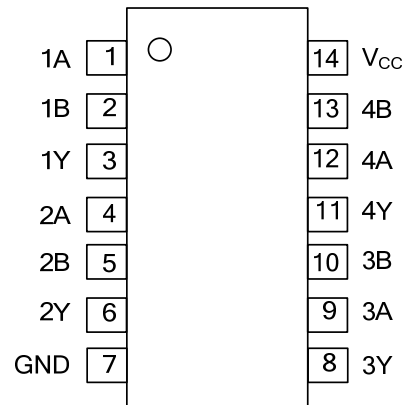


■ FUNCTION TABLE

INPUT(A)	INPUT(B)	OUTPUT(Y)
H	H	L
L	X	H
X	L	H

H = High voltage level ; L = Low voltage level ; X = Don't care

■ LOGIC DIAGRAM (positive gate)



■ ABSOLUTE MAXIMUM RATING (T_A=25°C, unless otherwise specified) (Note 2)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V _{CC}	-0.5 ~ 7	V
Input Voltage	V _{IN}	-0.5 ~ V _{CC} +0.5	V
Output Voltage	V _{OUT}	-0.5 ~ V _{CC} +0.5	V
Input Clamp Current (V _{IN} < 0 or V _{IN} > V _{CC})	I _{IK}	±20	mA
Output Clamp Current (V _{OUT} < 0 or V _{OUT} > V _{CC})	I _{OK}	±20	mA
Output Current (V _{OUT} =0V ~ V _{CC})	I _{OUT}	±50	mA
V _{CC} or GND Current	I _{CC}	±200	mA
Storage Temperature	T _{STG}	-65 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ RECOMMENDED OPERATING CONDITIONS (T_A=25°C, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V _{CC}	4.5 ~ 5.5	V
Input Voltage	V _{IN}	0 ~ V _{CC}	V
Output Voltage	V _{OUT}	0 ~ V _{CC}	V
Input Transition Rise or Fall Rate	Δt/Δv	8	ns/V
Operating Temperature	T _A	-40 ~ +125	°C

■ ELECTRICAL CHARACTERISTICS (T_A=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
High Level Input Voltage	V _{IH}	V _{CC} =4.5~5.5V	2			V
Low Level Input Voltage	V _{IL}	V _{CC} =4.5~5.5V			0.8	V
High-Level Output Voltage	V _{OH}	V _{CC} =4.5V	I _{OH} =-24mA	3.86		V
			I _{OH} =-50μA	4.4	4.49	V
		V _{CC} =5.5V	I _{OH} =-24mA	4.86		V
			I _{OH} =-50μA	5.4	5.49	V
Low-Level Output Voltage	V _{OL}	V _{CC} =4.5V	I _{OL} =24mA		0.36	V
			I _{OL} =50μA	0.001	0.1	V
		V _{CC} =5.5V	I _{OL} =24mA		0.36	V
			I _{OL} =50μA	0.001	0.1	V
Input Leakage Current	I _{I(LEAK)}	V _{CC} =5.5V, V _{IN} =V _{CC} or GND			±0.1	μA
Quiescent Supply Current	I _Q	V _{CC} =5.5V, V _{IN} =V _{CC} or GND, I _{OUT} =0A			2	μA
Additional Quiescent Supply Current Per Input Pin	ΔI _Q	V _{CC} =5.5V, One input at 3.4V, Other inputs at V _{CC} or GND		0.6		mA
Input Capacitance	C _I	V _{CC} = 5V, V _{IN} = V _{CC} or GND		2.6		pF


■ SWITCHING CHARACTERISTICS (T_A=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Propagation delay from input (A or B) to output(Y)	t _{PLH}	V _{CC} =5V±0.5V, C _L =50pF, R _L =500Ω	1.5	5.5	9.0	ns
	t _{PHL}		1.5	4.0	7.0	ns


■ OPERATING CHARACTERISTICS (T_A=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Power Dissipation Capacitance	C _{PD}	V _{CC} =5.0V, C _L =50pF, f=10MHz		40		pF

■ TEST CIRCUIT AND WAVEFORMS



Note : C_L includes probe and jig capacitance.

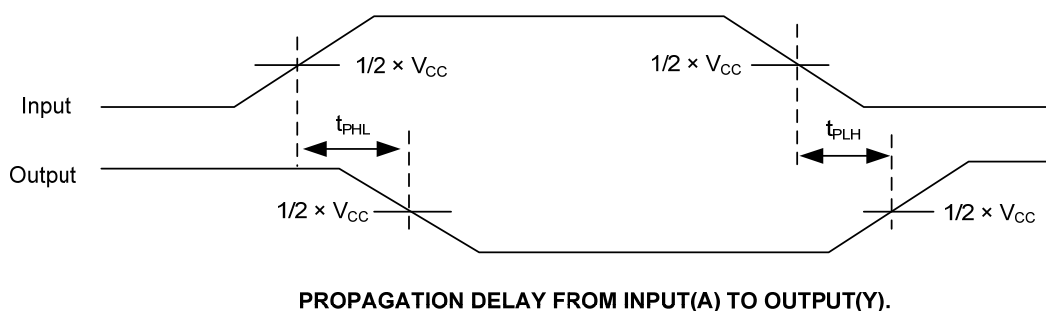

Notes: 1. C_L includes probe and jig capacitance.

2. All input pulses are supplied by generators having the following characteristics: $PRR \leq 1\text{MHz}$, $Z_o = 50\Omega$.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.