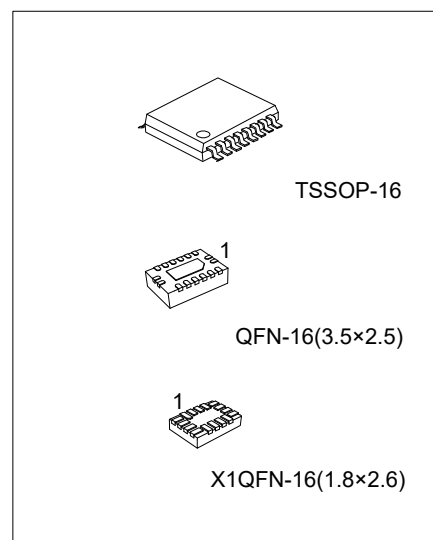


**U74AVC4T774****CMOS IC****4-BIT DUAL-SUPPLY BUS
TRANSCEIVER WITH
CONFIGURABLE
VOLTAGE-LEVEL SHIFTING
AND 3-STATE OUTPUTS WITH
INDEPENDENT DIRECTION
CONTROL INPUTS****DESCRIPTION**

The **U74AVC4T774** is a 4-bit noninverting bus transceiver uses two separate configurable power-supply rails. The A port is designed to track V_{CCA} . V_{CCA} accepts any supply voltage from 1.1V to 3.6V. The B port is designed to track V_{CCB} . V_{CCB} accepts any supply voltage from 1.1 to 3.6V. The control pins (DIR1, DIR2, DIR3, DIR4, and OE) are supplied by V_{CCA} . The data transmits from A port to B port when DIR is high, the data transmits from B port to A port when DIR is low.

The device is fully specified for partial power-down applications using I_{OFF} . The I_{OFF} circuitry disables the output, preventing any damaging backflow current through the device when it is powered down.

FEATURES




- * Each channel has an independent DIR control input
- * Control inputs V_{IH}/V_{IL} levels are referenced to V_{CCA} voltage
- * Fully configurable dual-rail design allows each port to operate over the full 1.1V to 3.6V power-supply range
- * Partial-power-down mode operation

ORDERING INFORMATION


Ordering Number		Package	Packing
Lead Free	Halogen Free		
U74AVC4T774L-P16-R	U74AVC4T774G-P16-R	TSSOP-16	Tape Reel
U74AVC4T774L-QAE-R	U74AVC4T774G-QAE-R	X1QFN-16(1.8×2.6)	Tape Reel
U74AVC4T774L-QAH-R	U74AVC4T774G-QAH-R	QFN-16(3.5×2.5)	Tape Reel

U74AVC4T774G-P16-R	(1)Packing Type (2)Package Type (3)Green Package	(1) R: Tape Reel (2) P16: TSSOP-16, QAE: X1QFN-16(1.8×2.6) QAH: QFN-16(3.5×2.5) (3) G: Halogen Free and Lead Free, L: Lead Free
--------------------	--	--

MARKING

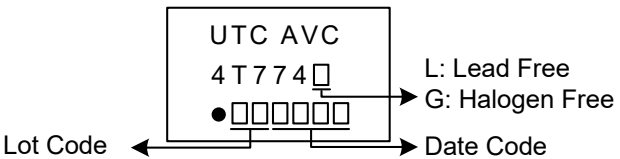PACKAGE	MARKING
TSSOP-16	 UTC → Date Code AVC4T774 → L: Lead Free → G: Halogen Free → Lot Code
X1QFN-16(1.8×2.6)	 V 4 7
QFN-16(3.5×2.5)	 UTC AVC 4 T 7 7 4 → L: Lead Free → G: Halogen Free Lot Code ← → Date Code

PIN CONFIGURATION


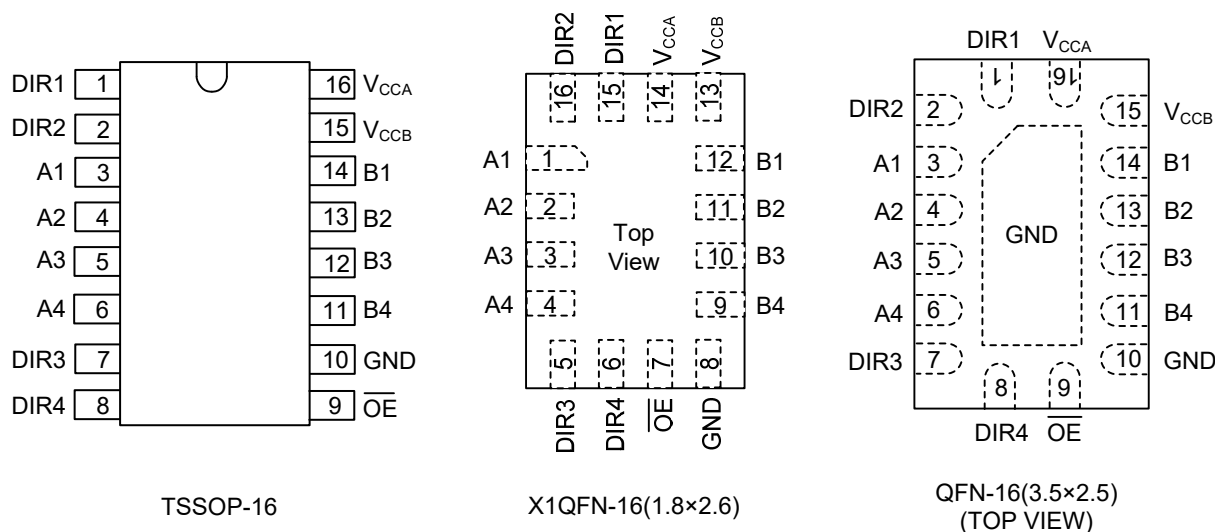


FUNCTION TABLE

CONTROL INPUT		OUTPUT		OPERATION
OE	DIRn	An	Bn	
L	L	Enabled	Z	B Data to A Data
L	H	Z	Enabled	A Data to B Data
H	X	Z	Z	Isolation

Note: H: HIGH voltage level, L: LOW voltage level, X =Don't care, Z = HIGH-Impedance OFF-State

■ LOGIC DIAGRAM

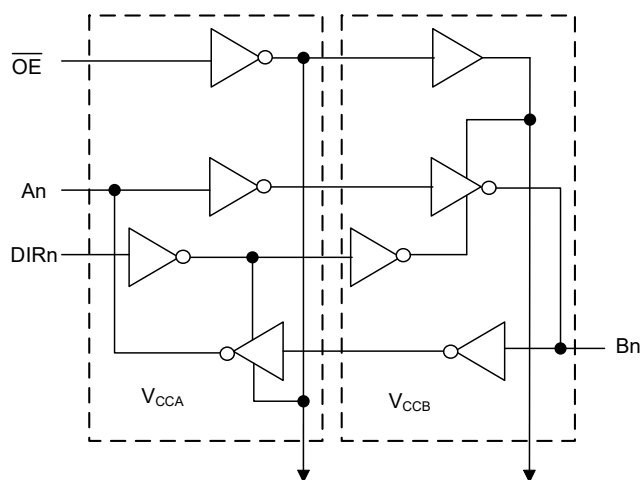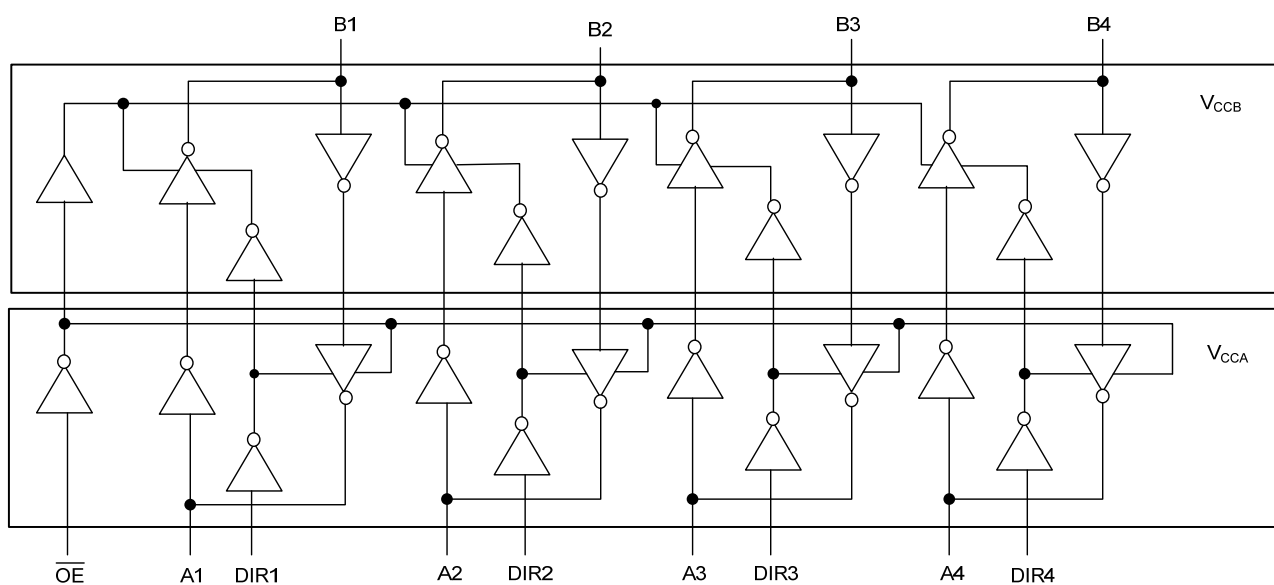

■ ABSOLUTE MAXIMUM RATING (T_A=25°C, unless otherwise specified)

PARAMETER	SYMBOL	CONDITIONS	RATINGS	UNIT
Supply Voltage A	V _{CCA}		-0.5 ~ +4.6	V
Supply Voltage B	V _{CCB}		-0.5 ~ +4.6	V
Input Voltage	V _{IN}		-0.5 ~ +4.6	V
Output Voltage	V _{OUT}	Active mode	-0.5 ~ V _{CCO} +0.5	V
		Suspend or 3-state mode	-0.5 ~ +4.6	V
Input Clamp Current	I _{IK}	V _{IN} <0V	-50	mA
Output Clamp Current	I _{OK}	V _{OUT} <0V	-50	mA
Continuous V _{CC} or GND Current	I _{CC}	I _{CCA} or I _{CCB}	±100	mA
Continuous Output Current	I _{OUT}	V _{OUT} =0V to V _{CCO}	±50	mA
Storage Temperature	T _{STG}		-65 ~ +150	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

3. V_{CCO} is the V_{CC} associated with the output port.

4. V_{CCO} + 0.5V should not exceed 4.6V.

■ THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	TSSOP-16	θ _{JA}	110	°C/W
	X1QFN-16(1.8×2.6)		160	°C/W
	QFN-16(3.5×2.5)		90	°C/W

■ RECOMMENDED OPERATING COMDITIONS

PARAMETER	SYMBOL	CONDITIONS	MIN	TPY	MAX	UNIT
Supply Voltage A	V _{CCA}		1.1		3.6	V
Supply Voltage B	V _{CCB}		1.1		3.6	V
Input Voltage	V _{IN}		0		3.6	V
Output Voltage	V _{OUT}	Active mode	0		V _{CCO}	V
		Suspend or 3-state mode	0		3.6	V
Input Transition Rise or Fall Rate	Δt / Δv				10	ns/V
Operating Temperature	T _A		-40		+125	°C

■ ELECTRICAL CHARACTERISTICS (Note 1, 2, 3)

PARAMETER		SYMBOL	TEST CONDITIONS	T _A =25°C			T _A =-40°C~+125°C			UNIT
				MIN	TYP	MAX	MIN	TYP	MAX	
High-Level Input Voltage	Data Inputs	V _{IH}	V _{CCI} =1.1V ~ 1.95V	0.65× V _{CCI}			0.65× V _{CCI}			V
			V _{CCI} =1.95V ~ 2.7V	1.6			1.6			V
			V _{CCI} =2.7V ~ 3.6V	2			2			V
	DIR, OE Input		V _{CCA} =1.1V ~ 1.95V	0.65× V _{CCA}			0.65× V _{CCA}			V
			V _{CCA} =1.95V ~ 2.7V	1.6			1.6			V
			V _{CCA} =2.7V ~ 3.6V	2			2			V
Low-Level Input Voltage	Data Inputs	V _{IL}	V _{CCI} =1.1V ~ 1.95V			0.35× V _{CCI}			0.35× V _{CCI}	V
			V _{CCI} =1.95V ~ 2.7V			0.7			0.7	V
			V _{CCI} =2.7V ~ 3.6V			0.8			0.8	V
	DIR, OE Input		V _{CCA} =1.1V ~ 1.95V			0.35× V _{CCA}			0.35× V _{CCA}	V
			V _{CCA} =1.95V ~ 2.7V			0.7			0.7	V
			V _{CCA} =2.7V ~ 3.6V			0.8			0.8	V
High-Level Output Voltage		V _{OH}	V _{CCA} = V _{CCB} =1.1V ~ 3.6V, V _{IN} =V _{IH} or V _{IL} , I _{OH} =-100μA	V _{CCO} - 0.1			V _{CCO} - 0.2			V
			V _{CCA} = V _{CCB} =1.2V, V _{IN} =V _{IH} or V _{IL} , I _{OH} =-3mA	0.85			0.85			V
			V _{CCA} = V _{CCB} =1.4V, V _{IN} =V _{IH} or V _{IL} , I _{OH} =-6mA	1.05			1.05			V
			V _{CCA} = V _{CCB} =1.65V, V _{IN} =V _{IH} or V _{IL} , I _{OH} =-8mA	1.2			1.2			V
			V _{CCA} = V _{CCB} =2.3V, V _{IN} =V _{IH} or V _{IL} , I _{OH} =-9mA	1.75			1.75			V
			V _{CCA} = V _{CCB} =3.0V, V _{IN} =V _{IH} or V _{IL} , I _{OH} =-12mA	2.3			2.3			V
Low-Level Output Voltage		V _{OL}	V _{CCA} = V _{CCB} =1.1V ~ 3.6V, V _{IN} =V _{IH} or V _{IL} , I _{OL} =100μA			0.1			0.2	V
			V _{CCA} = V _{CCB} =1.2V, V _{IN} =V _{IH} or V _{IL} , I _{OL} =3mA			0.25			0.25	V
			V _{CCA} = V _{CCB} =1.4V, V _{IN} =V _{IH} or V _{IL} , I _{OL} =6mA			0.35			0.35	V
			V _{CCA} = V _{CCB} =1.65V, V _{IN} =V _{IH} or V _{IL} , I _{OL} =8mA			0.45			0.45	V
			V _{CCA} = V _{CCB} =2.3V, V _{IN} =V _{IH} or V _{IL} , I _{OL} =9mA			0.55			0.55	V
			V _{CCA} = V _{CCB} =3.0V, V _{IN} =V _{IH} or V _{IL} , I _{OL} =12mA			0.7			0.7	V

■ ELECTRICAL CHARACTERISTICS (Cont.)

PARAMETER		SYMBOL	TEST CONDITIONS	T _A =25°C			T _A =-40°C~+125°C			UNIT
				MIN	TYP	MAX	MIN	TYP	MAX	
Input Leakage Current	DIR, $\overline{\text{OE}}$ Input	I _{I(LEAK)}	V _{CCA} =V _{CCB} =1.1V~3.6V V _{IN} =0V or 3.6V			±1			±5	μA
Power OFF Leakage Current	A Port	I _{OFF}	V _{CCA} =0V, V _{CCB} =1.1V~3.6V V _{IN} or V _{OUT} =0V~3.6V			±5			±30	μA
	B Port		V _{CCB} =0V, V _{CCA} =1.1V~3.6V V _{IN} or V _{OUT} =0V~3.6V			±5			±30	μA
Output OFF-State Current	A or B Port (Note 3)	I _{OZ}	V _{CCA} =V _{CCB} =3.6V V _O = V _{CCO} or GND, V _I = V _{CCI} or GND, OE = V _{IH}			±5			±30	μA
Quiescent Supply Current	A Port	I _{CCA}	V _{CCA} =1.1V~3.6V V _{CCB} =1.1V~3.6V V _{IN} =0V or V _{CCI} , I _O =0A			8			50	μA
			V _{CCA} =0V~3.6V, V _{CCB} =0V V _{IN} =0V or V _{CCI} , I _O =0A			8			50	μA
			V _{CCA} =0V, V _{CCB} =0V~3.6V V _{IN} =0V or V _{CCI} , I _O =0A	-2			-12			μA
Quiescent Supply Current	B Port	I _{CCB}	V _{CCA} =1.1V~3.6V V _{CCB} =1.1V~3.6V V _{IN} =0V or V _{CCI} , I _O =0A			8			50	μA
			V _{CCA} =0V~3.6V, V _{CCB} =0V V _{IN} =0V or V _{CCI} , I _O =0A	-2			-12			μA
			V _{CCA} =0V, V _{CCB} =0V~3.6V V _{IN} =0V or V _{CCI} , I _O =0A				8			50
Quiescent Supply Current		I _{CCA} +I _{CCB}	V _{CCA} =1.1V~3.6V V _{CCB} =1.1V~3.6V V _{IN} =0V or V _{CCI} , I _O =0A			16			65	μA
Input Capacitance	Control Inputs	C _{IN}	V _{CCA} =V _{CCB} =3.3V V _{IN} =0V or 3.3V		2.5				4.5	pF
Input / Output Capacitance	A or B Port	C _{IO}	V _{CCA} =V _{CCB} =3.3V V _{OUT} =3.3V or 0V		5				7	pF

Notes: 1. V_{CCI} is the V_{CC} associated with the input port.
 2. V_{CCO} is the V_{CC} associated with the output port.
 3. For I/O ports, the parameter I_{OZ} includes the input leakage current.

SWITCHING CHARACTERISTICS

(Over recommended operating free-air temperature range, $V_{CCA}=1.2\pm0.1V$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	$T_A=25^{\circ}C$			$T_A=-40^{\circ}C\sim+125^{\circ}C$			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
Propagation Delay From Input (A) to Output (B)	t_{PLH} t_{PHL}	$V_{CCB}=1.2\pm0.1V$	0.1		20	0.1		25	ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		19	0.1		24	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		18	0.1		23	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		15.6	0.1		20.6	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		11.5	0.1		16.5	ns
Propagation Delay From Input (B) to Output (A)	t_{PLH} t_{PHL}	$V_{CCB}=1.2\pm0.1V$	0.1		18	0.1		23	ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		17	0.1		22	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		16	0.1		21	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		15	0.1		20	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		14	0.1		19	ns
Propagation Delay From Input ($\overline{OE}$) to Output (A)	t_{PHZ} t_{PLZ}	$V_{CCB}=1.2\pm0.1V$	0.1		18	0.1		20	ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		18	0.1		20	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		18	0.1		20	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		18	0.1		20	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		18	0.1		20	ns
Propagation Delay From Input ($\overline{OE}$) to Output (B)	t_{PHZ} t_{PLZ}	$V_{CCB}=1.2\pm0.1V$	0.1		19	0.1		23	ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		17	0.1		21	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		16	0.1		20	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		13.5	0.1		17.5	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		13	0.1		17	ns
Propagation Delay From Input ($\overline{OE}$) to Output (A)	t_{PZH} t_{PZL}	$V_{CCB}=1.2\pm0.1V$	0.1		23	0.1		27	ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		23	0.1		27	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		23	0.1		27	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		23	0.1		27	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		23	0.1		27	ns
Propagation Delay From Input ($\overline{OE}$) to Output (B)	t_{PZH} t_{PZL}	$V_{CCB}=1.2\pm0.1V$	0.1		25	0.1		28	ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		22	0.1		25	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		18	0.1		21	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		15	0.1		18	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		14	0.1		17	ns

SWITCHING CHARACTERISTICS

(Over recommended operating free-air temperature range, $V_{CCA}=1.5\pm0.1V$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	$T_A=25^{\circ}C$			$T_A=-40^{\circ}C\sim+125^{\circ}C$			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
Propagation Delay From Input (A) to Output (B)	t_{PLH} t_{PHL}	$V_{CCB}=1.2\pm0.1V$	0.1		19	0.1		24	ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		18	0.1		23	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		17.2	0.1		22.2	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		14.6	0.1		19.6	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		10.5	0.1		15.5	ns
Propagation Delay From Input (B) to Output (A)	t_{PLH} t_{PHL}	$V_{CCB}=1.2\pm0.1V$	0.1		17.1	0.1		22.1	ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		16.1	0.1		21.1	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		15.1	0.1		20	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		13.9	0.1		18.9	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		12.6	0.1		17.6	ns
Propagation Delay From Input ($\overline{OE}$) to Output (A)	t_{PHZ} t_{PLZ}	$V_{CCB}=1.2\pm0.1V$	0.1		16	0.1		18	ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		16	0.1		18	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		16	0.1		18	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		16	0.1		18	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		16	0.1		18	ns
Propagation Delay From Input ($\overline{OE}$) to Output (B)	t_{PHZ} t_{PLZ}	$V_{CCB}=1.2\pm0.1V$	0.1		18	0.1		20	ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		16	0.1		18	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		14	0.1		16	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		12	0.1		14	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		11	0.1		13	ns
Propagation Delay From Input ($\overline{OE}$) to Output (A)	t_{PZH} t_{PZL}	$V_{CCB}=1.2\pm0.1V$	0.1		20.5	0.1		23	ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		20.5	0.1		23	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		20.5	0.1		23	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		20.5	0.1		23	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		20.5	0.1		23	ns
Propagation Delay From Input ($\overline{OE}$) to Output (B)	t_{PZH} t_{PZL}	$V_{CCB}=1.2\pm0.1V$	0.1		23.7	0.1		26	ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		20.5	0.1		23.5	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		16.2	0.1		19	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		13.6	0.1		16.6	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		12.5	0.1		15.5	ns

SWITCHING CHARACTERISTICS

(Over recommended operating free-air temperature range, $V_{CCA}=1.8V\pm0.15V$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	$T_A=25^{\circ}C$			$T_A=-40^{\circ}C\sim+125^{\circ}C$			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
Propagation Delay From Input (A) to Output (B)	t_{PLH} t_{PHL}	$V_{CCB}=1.2V\pm0.1V$	0.1		18.2	0.1		23	ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		17.4	0.1		22.4	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		16.5	0.1		21.5	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		13.8	0.1		18.8	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		9.6	0.1		14.6	ns
Propagation Delay From Input (B) to Output (A)	t_{PLH} t_{PHL}	$V_{CCB}=1.2V\pm0.1V$	0.1		16.3	0.1		21.3	ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		15.3	0.1		20.3	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		14	0.1		19	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		13	0.1		18	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		11.4	0.1		15	ns
Propagation Delay From Input ($\overline{OE}$) to Output (A)	t_{PHZ} t_{PLZ}	$V_{CCB}=1.2V\pm0.1V$	0.1		14.6	0.1		17	ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		14.6	0.1		17	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		14.6	0.1		17	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		14.6	0.1		17	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		14.6	0.1		17	ns
Propagation Delay From Input ($\overline{OE}$) to Output (B)	t_{PHZ} t_{PLZ}	$V_{CCB}=1.2V\pm0.1V$	0.1		17	0.1		19	ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		15	0.1		17	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		13	0.1		15	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		10	0.1		12	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		8.5	0.1		10	ns
Propagation Delay From Input ($\overline{OE}$) to Output (A)	t_{PZH} t_{PZL}	$V_{CCB}=1.2V\pm0.1V$	0.1		18	0.1		22	ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		18	0.1		22	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		18	0.1		22	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		18	0.1		22	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		18	0.1		22	ns
Propagation Delay From Input ($\overline{OE}$) to Output (B)	t_{PZH} t_{PZL}	$V_{CCB}=1.2V\pm0.1V$	0.1		20	0.1		23	ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		18	0.1		21	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		14.5	0.1		17.5	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		11	0.1		14	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		9.7	0.1		12.5	ns

SWITCHING CHARACTERISTICS (Cont.)

(Over recommended operating free-air temperature range, $V_{CCA}=2.5V\pm0.2V$, unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITIONS	$T_A=25^{\circ}C$			$T_A=-40^{\circ}C\sim+125^{\circ}C$			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
Propagation Delay From Input (A) to Output (B)	t_{PLH} t_{PHL}	$V_{CCB}=1.2V\pm0.1V$	0.1		16.5	0.1		21	ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		15.6	0.1		20.6	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		14.6	0.1		19.6	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		11.6	0.1		16	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		7.3	0.1		11.3	ns
Propagation Delay From Input (B) to Output (A)	t_{PLH} t_{PHL}	$V_{CCB}=1.2V\pm0.1V$	0.1		14.2	0.1		19.2	ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		13.2	0.1		18.2	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		12.2	0.1		17	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		10.4	0.1		15.4	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		8.2	0.1		13.2	ns
Propagation Delay From Input ($\overline{OE}$) to Output (A)	t_{PHZ} t_{PLZ}	$V_{CCB}=1.2V\pm0.1V$	0.1		10.7	0.1		12.5	ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		10.7	0.1		12.5	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		10.7	0.1		12.5	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		10.7	0.1		12.5	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		10.7	0.1		12.5	ns
Propagation Delay From Input ($\overline{OE}$) to Output (B)	t_{PHZ} t_{PLZ}	$V_{CCB}=1.2V\pm0.1V$	0.1		15	0.1		17	ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		13	0.1		15	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		10	0.1		12	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		8	0.1		10	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		7.5	0.1		9	ns
Propagation Delay From Input ($\overline{OE}$) to Output (A)	t_{PZH} t_{PZL}	$V_{CCB}=1.2V\pm0.1V$	0.1		11	0.1		14	ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		11	0.1		14	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		11	0.1		14	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		11	0.1		14	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		11	0.1		14	ns
Propagation Delay From Input ($\overline{OE}$) to Output (B)	t_{PZH} t_{PZL}	$V_{CCB}=1.2V\pm0.1V$	0.1		17	0.1		19	ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		15.5	0.1		18	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		12	0.1		15	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		7.8	0.1		10.5	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		6.3	0.1		9.3	ns

SWITCHING CHARACTERISTICS (Cont.)

(Over recommended operating free-air temperature range, $V_{CCA}=3.3V\pm0.3V$, unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITIONS	$T_A=25^{\circ}C$			$T_A=-40^{\circ}C\sim+125^{\circ}C$			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
Propagation Delay From Input (A) to Output (B)	t_{PLH} t_{PHL}	$V_{CCB}=1.2V\pm0.1V$	0.1		15	0.1		20	ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		13.5	0.1		18.5	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		12.3	0.1		17.3	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		8.8	0.1		13.8	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		4.2	0.1		9.2	ns
Propagation Delay From Input (B) to Output (A)	t_{PLH} t_{PHL}	$V_{CCB}=1.2V\pm0.1V$	0.1		11.5	0.1		16.5	ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		10.5	0.1		15.5	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		9.5	0.1		14.5	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		7	0.1		12	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		4	0.1		9	ns
Propagation Delay From Input ($\overline{OE}$) to Output (A)	t_{PHZ} t_{PLZ}	$V_{CCB}=1.2V\pm0.1V$	0.1		6	0.1		8	ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		6	0.1		8	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		6	0.1		8	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		6	0.1		8	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		6	0.1		8	ns
Propagation Delay From Input ($\overline{OE}$) to Output (B)	t_{PHZ} t_{PLZ}	$V_{CCB}=1.2V\pm0.1V$	0.1		14	0.1		16	ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		12	0.1		14	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		9.5	0.1		11	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		7	0.1		9	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		6.5	0.1		8	ns
Propagation Delay From Input ($\overline{OE}$) to Output (A)	t_{PZH} t_{PZL}	$V_{CCB}=1.2V\pm0.1V$	0.1		5	0.1		7	ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		5	0.1		7	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		5	0.1		7	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		5	0.1		7	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		5	0.1		7	ns
Propagation Delay From Input ($\overline{OE}$) to Output (B)	t_{PZH} t_{PZL}	$V_{CCB}=1.2V\pm0.1V$	0.1		16.5	0.1		18	ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		14.5	0.1		16	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		11	0.1		14	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		7	0.1		9	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		5	0.1		7	ns

TEST CIRCUIT AND WAVEFORMS

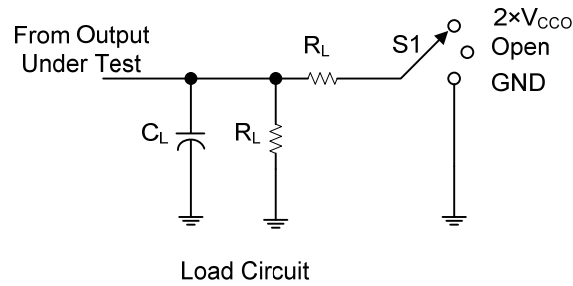


TEST	S1
t_{PD}	Open
t_{PLZ}/t_{PZL}	$2 \times V_{CCO}$
t_{PHZ}/t_{PZH}	GND


V_{CCO}	C_L	R_L	V_{TP}
1.2V to 0.1V	15pF	2K Ω	0.1V
1.5V to 0.1V	15pF	2K Ω	0.1V
1.8V $\pm$ 0.15V	15pF	2K Ω	0.15V
2.5V $\pm$ 0.2V	15pF	2K Ω	0.15V
3.3V $\pm$ 0.3V	15pF	2K Ω	0.3V

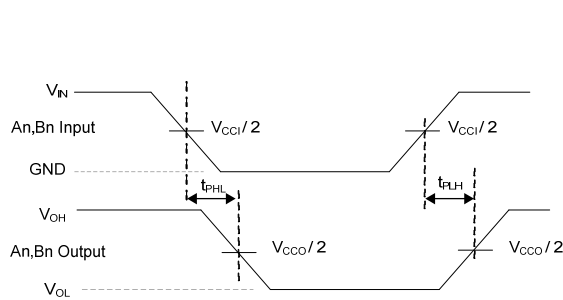

PROPAGATION DELAY TIMES

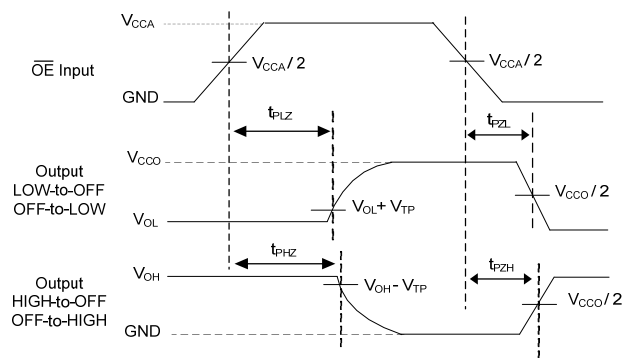

ENABLE AND DISABLE TIMES

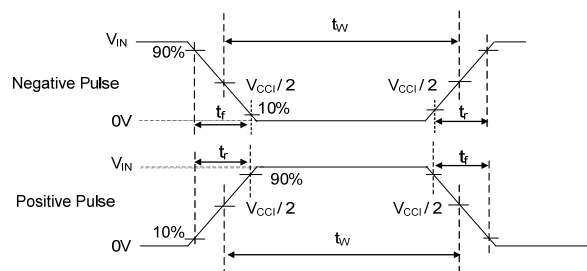

MEASURING SWITCHING TIMES

Notes: 1. C_L includes probe and jig capacitance.

2. All input pulses are supplied by generators having the following characteristics: $P_{RR} \leq 1\text{MHz}$, $Z_O = 50\Omega$.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.